


Scotch Yoke Pneumatic Actuator

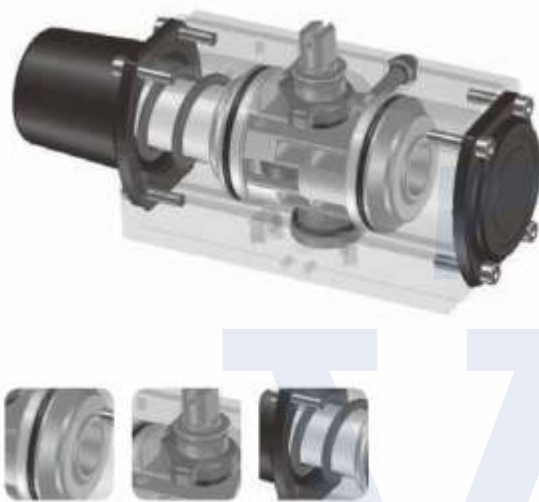

● Scotch Yoke Pneumatic Actuator

The **BM Series** pneumatic actuator is designed using Scotch-Yoke technology. Scotch-Yoke technology is well known to all users as the most suitable actuator mechanism for valve and damper operation as it produces higher torque at both end position. The latest manufacturing technologies have been operated in order to supply a high quality and cycle-life on **actuator**. Our extensive inventory & engineering capabilities allow us to provide reliable and safety product to our customer with satisfaction.

● SPECIFICATION

Pressure Range	Maximum Working Pressure : 10 Bar[143 Psi]
Temperature Range	Standard: -20°C-80°C Low: -40°C-110°C High: -20°C-150°C
Movement	90 degree +5- -10 [optional -30 degree]
Lubrication	All moving parts are lubricated for long life cycle.
Life Cycle	More than 1,000,000 Operations.

FEATURES

Center Stopper Bolt

Adjustment for open & close positions
90 degree : adjustable +5 ~ -10 degree
Max : -30 degree



Mounting Holes

Easy to mount accessory
VDI/VDE 3845 NAMUR

Spring Pack

Pre-compressed for safety

Mounting Holes

International standard
ISO5211, DIN3337, NAMUR

Double Square Drive Shaft

ISO5211 NAMUR

NAMUR Drive Shaft

Mechanical Stopper

Cylinder

Hard anodized aluminum



O-Ring

Specially treated for
reducing friction


Guide Ring

For longer working life cycle

Direct Mounting NAMUR

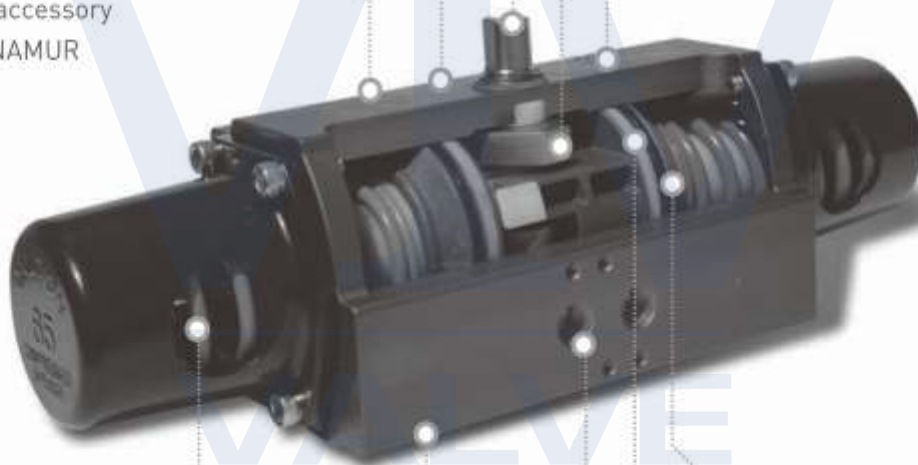


PART LIST (BM - SERIES)

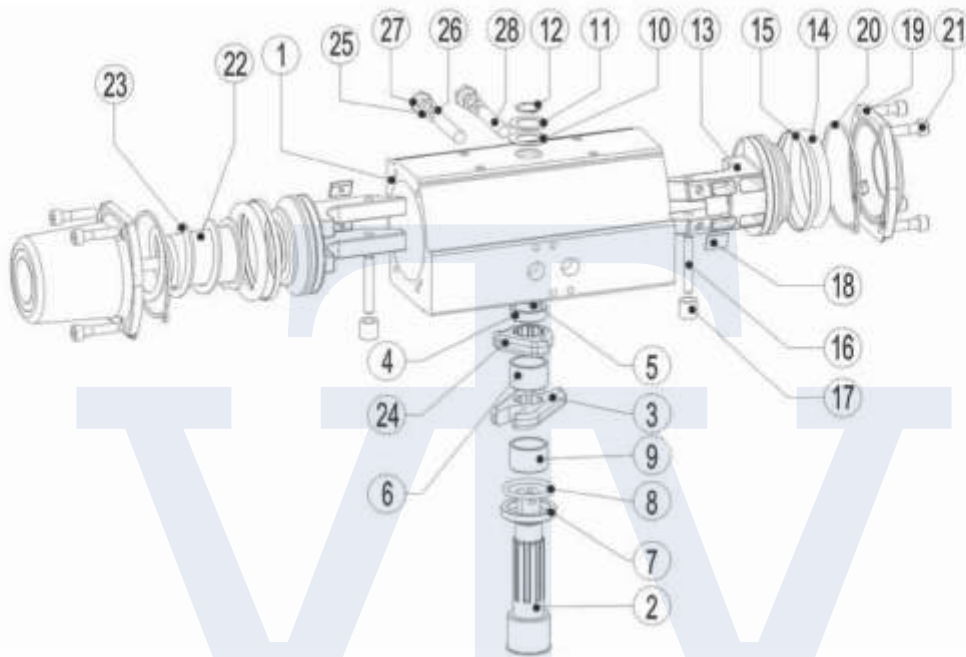

NO.	Part Name	Materials	NO.	Part Name	Materials
1	Body	Aluminum Alloy	15	Piston Guide-ring	Engineering Plastic
2	Shaft	Steel Alloy (Nickel Plated)	16	Piston Pin	Steel Alloy
3	Crank	Steel Alloy	17	Piston Roller	Steel Alloy
4	Bushing (Top)	Engineering Plastic	18	Piston Pad	Engineering Plastic
5	Body O-ring (Top)	NBR	19	Cover	Aluminum Alloy
6	Shaft Roller (Top)	Engineering Plastic	20	Cover O-ring	NBR
7	Bushing (Bottom)	Engineering Plastic	21	Cover Bolt	Steel Alloy
8	Body O-ring (Bottom)	NBR	22	Spring Cap	Engineering Plastic
9	Shaft Roller (Bottom)	Engineering Plastic	23	Spring	Steel Alloy
10	Body Washer (Bottom)	Engineering Plastic	24	Stopper	Steel Alloy
11	Body Washer (Top)	Stainless Steel	25	Adjust Washer	Stainless Steel
12	Body Snap-ring	Stainless Steel	26	Adjust Nut	Stainless Steel
13	Piston	Aluminum Alloy	27	Adjust O-ring	NBR
14	Piston O-ring	NBR	28	Adjust Bolt	Steel Alloy

DIMENSION


DOUBLE ACTING

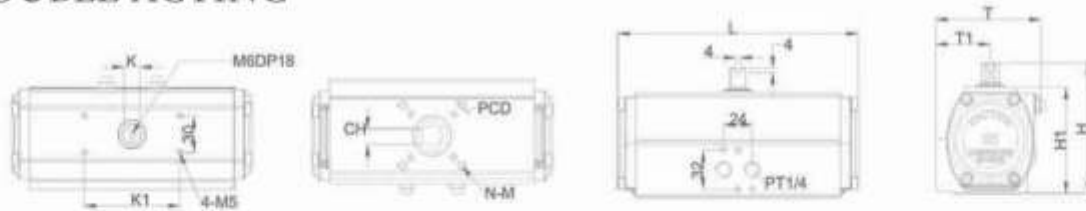

MODEL	K1	ISO5211	P.C.D.(\varnothing)	N-M	K	L	T	T1	H	H1	CH	DTH	WG(Kg)
BM 50 DA	80	F03/F05/F07	36/50/70	4-M5/M6/M8	10	162	75	40	90	70	11x11 14x14	13 14	1.6
BM 65 DA	80	F05/F07	50/70	4-M6/M8	13	198	89	46	107	87	14x14	17	2.7
BM 80 DA	80	F07	70	4-M8	17	262	101	49.5	126	106	17x17	19	4.3
BM 100 DA	80	F07/F10	70/102	4-M8/M10	22	311	129	61.5	148	128	22x22	26	7.5
BM 125 DA	80	F07/F10	70/102	4-M8/M10	22	390	151	72	174	154	22x22	26	11.6
BM 140 DA	80	F10/F12	102/125	4-M10/M12	22	445	162	77	190	170	27x27	30	18
BM 160 DA	80	F14	140	4-M16	32	529	181	88	210	190	36-36	42	26
BM 210 DA	130	F16	165	4-M20	36	605	231	115	284	254	46x46	60	47.2

UNIT : mm

SPRING RETURN

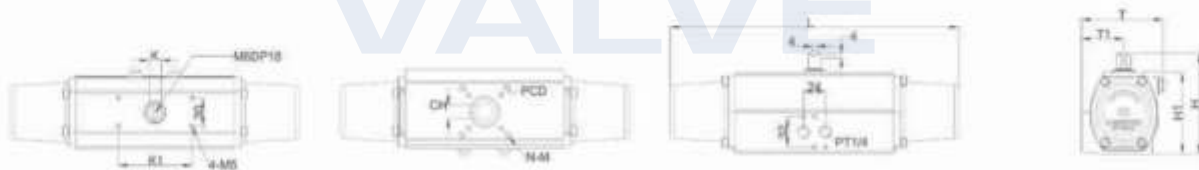

MODEL	K1	ISO5211	P.C.D.(\varnothing)	N-M	K	L	T	T1	H	H1	CH	DTH	WG(Kg)
BM 50 SR	80	F03/F05/F07	36/50/70	4-M5/M6/M8	10	257	75	40	90	70	11x11 14x14	13 14	1.7
BM 65 SR	80	F05/F07	50/70	4-M6/M8	13	314	89	46	107	87	14x14	17	3.4
BM 80 SR	80	F07	70	4-M8	17	430	101	49.5	126	106	17x17	19	5.7
BM 100 SR	80	F07/F10	70/102	4-M8/M10	22	500	129	61.5	148	128	22x22	26	10.6
BM 125 SR	80	F07/F10	70/102	4-M8/M10	22	606	151	72	174	154	22x22	26	17.9
BM 140 SR	80	F10/F12	102/125	4-M10/M12	22	710	162	77	190	170	27x27	30	24.5
BM 160 SR	80	F14	140	4-M16	32	815	181	88	210	190	36-36	42	36
BM 210 SR	130	F16	165	4-M20	36	982	231	115	284	254	46x46	60	76.9

UNIT : mm

TORQUE



DOUBLE ACTING OUTPUT TORQUE

Committed to continuous improvement

Model	Angle	Supply Air:3Bar		Supply Air:4Bar		Supply Air:4.5Bar		Supply Air:5Bar		Supply Air:6Bar	
		Air to Close	Air to Open	Air to Close	Air to Open	Air to Close	Air to Open	Air to Close	Air to Open	Air to Close	Air to Open
50 DA	0°	29.0	21.0	37.0	28.0	37.5	32.5	38.0	37.0	42.0	41.0
	45°	15.0	16.0	20.0	21.0	22.5	23.5	25.0	26.0	30.0	31.0
	90°	25.0	25.0	33.0	38.0	36.0	39.0	39.0	40.0	50.0	52.0
65 DA	0°	63.0	59.0	85.0	78.0	95.0	86.5	105.0	95.0	131.0	116.0
	45°	33.0	38.0	45.0	49.0	51.0	56.0	57.0	63.0	68.0	73.0
	90°	54.0	52.0	72.0	71.0	80.0	82.0	88.0	93.0	107.0	107.0
80 DA	0°	121.0	105.0	164.0	143.0	160.0	163.0	156.0	183.0	261.0	210.0
	45°	65.0	69.0	84.0	92.0	98.0	106.5	112.0	121.0	130.0	144.0
	90°	97.0	101.0	130.0	133.0	150.5	144.5	171.0	156.0	198.0	209.0
100 DA	0°	194.0	186.0	265.0	247.0	298.5	269.5	332.0	292.0	393.0	368.0
	45°	110.0	127.0	147.0	165.0	166.0	180.5	185.0	196.0	237.0	250.0
	90°	173.0	179.0	231.0	237.0	264.0	269.0	297.0	301.0	348.0	363.0
125 DA	0°	428.0	432.0	576.0	551.0	650.5	614.5	725.0	678.0	886.9	793.9
	45°	255.0	273.0	339.0	360.0	382.0	401.5	425.0	443.0	513.0	531.0
	90°	385.0	375.0	510.0	491.0	572.5	552.0	635.0	613.0	750.0	732.0
140 DA	0°	623.0	576.0	829.9	753.9	967.4	838.4	1104.9	922.9	1310.9	1096.9
	45°	333.0	331.0	450.0	455.0	514.5	518.5	579.0	582.0	691.0	668.0
	90°	520.0	523.0	689.0	720.0	775.9	799.9	862.9	879.9	1054.9	969.9
160 DA	0°	952.9	812.9	1146.9	1061.9	1315.9	1186.9	1484.9	1311.9	1799.9	1599.9
	45°	540.0	569.0	730.0	757.9	824.9	853.4	919.9	948.9	1109.9	1132.9
	90°	879.9	978.9	1169.9	1319.9	1308.9	1477.4	1447.9	1634.9	1749.9	2026.9
210 DA	0°	1979.9	1909.9	2799.8	2599.8	2939.8	2859.8	3299.8	3199.8	3919.7	3819.7
	45°	1099.9	1149.9	1459.9	1499.9	1709.9	1749.9	1919.9	1949.9	2299.8	2399.8
	90°	1669.9	1719.9	2149.9	2299.8	2599.8	2709.8	2799.8	2899.8	3349.8	3449.8

Unit : N-m




● SPRING RETURN OUTPUT TORQUE

Maximize the torque

Model	Angle	2.8BAR(40PSI)		4.2BAR(60PSI)		5.6BAR(80PSI)	
		Spring to Close	Air to Open	Spring to Close	Air to Open	Spring to Close	Air to Open
50 SR	0°	10.0	20.0	14.0	26.0	17.0	34.0
	45°	9.0	9.0	12.0	12.0	15.0	15.0
	90°	20.0	10.0	26.0	14.0	34.0	17.0
65 SR	0°	22.0	39.0	35.0	54.0	48.0	70.0
	45°	18.0	18.0	23.0	28.0	37.0	32.0
	90°	39.0	22.0	54.0	35.0	70.0	48.0
80 SR	0°	40.0	70.0	60.0	100.0	80.0	130.0
	45°	30.0	30.0	50.0	50.0	70.0	70.0
	90°	70.0	40.0	100.0	60.0	130.0	80.0
100 SR	0°	70.0	140.0	100.0	190.0	130.0	240.0
	45°	50.0	50.0	80.0	80.0	110.0	110.0
	90°	140.0	70.0	190.0	100.0	240.0	130.0
125 SR	0°	150.0	250.0	230.0	380.0	300.0	510.0
	45°	130.0	130.0	190.0	190.0	260.0	260.0
	90°	250.0	150.0	380.0	230.0	510.0	300.0
140 SR	0°	200.0	370.0	300.0	550.0	410.0	730.0
	45°	170.0	170.0	290.0	290.0	340.0	340.0
	90°	370.0	200.0	550.0	300.0	730.0	410.0
160 SR	0°	400.0	540.0	550.0	750.0	769.9	1149.9
	45°	290.0	290.0	420.0	420.0	560.0	560.0
	90°	540.0	400.0	750.0	550.0	1149.9	769.9
210 SR	0°	670.0	1199.9	1049.9	1619.9	1419.9	2169.9
	45°	560.0	560.0	939.9	939.9	1259.9	1259.9
	90°	1199.9	670.0	1619.9	1049.9	2169.9	1419.9

Unit : N-m

Manual Handwheel

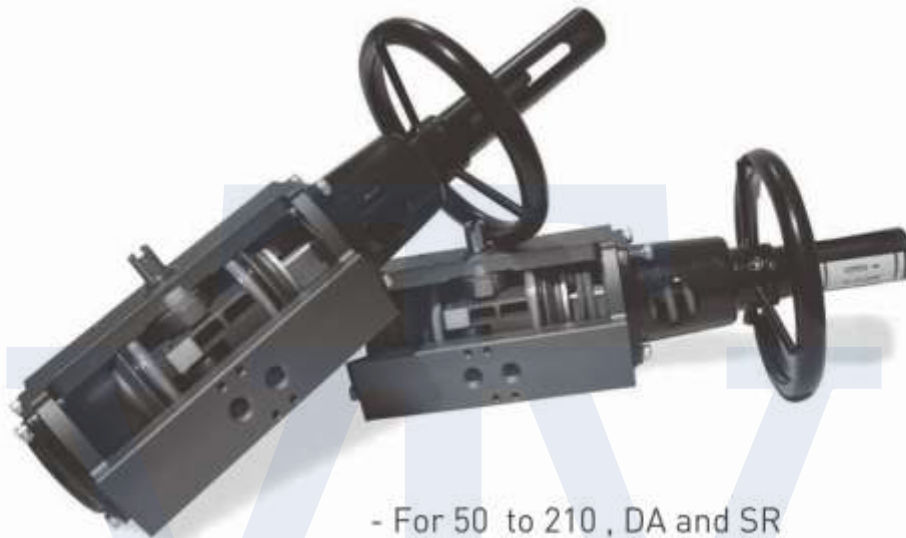

- For 50 to 210 , DA and SR
- Simple and Compact

● Our Commitment of Quality

Alohan is committed to continuous improvement. All efforts have been taken to maximize the accuracy of this information. Without notification, product specifications and design may be modified at any time. The issue of this document is for information only, and does not imply suitability, a warranty, or guarantee for a specific service.



VTV Corporation. All Rights Reserved sales@vtv-valve.com